


## EGHP Manual Grease Pump

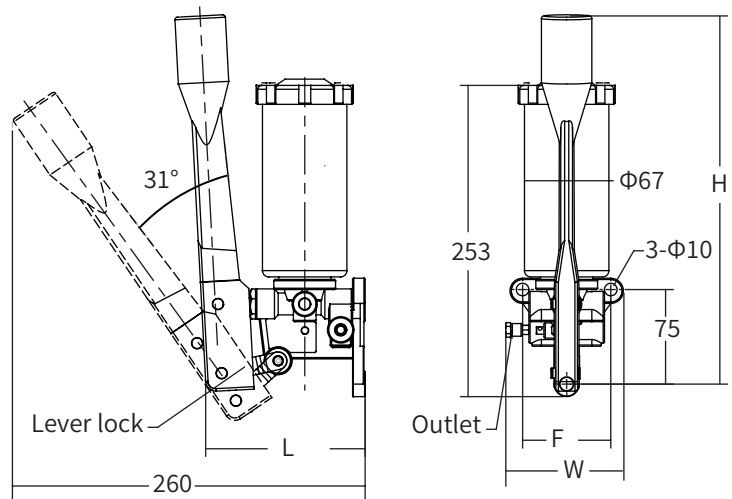

## Feature

1. Pull the handle to deliver lubricant, easy to operate.
2. With good adhesion of the pressure oil block, grease will not remain.
3. Outlet can be set on the left or right side of the handle according to the demand, or it can be double-outlet.
4. EGHP with strong spring, suitable for NLGI 1~2# grease.
5. The grease must be injected from the grease nipple to avoid air and foreign matter.

## Specification

Max output: 2mL/time
Max pressure: 10MPa
Outlet dia: Φ4, Φ6, Φ8, PT1/8
Lubricant: NLGI 1,2

## Dimension

Model	Grease tank	Fixing hole F(mm)	Length L(mm)	Width W(mm)	Height H(mm)	Weight (kg)
EGHP-6	600mL	70x75	134	95	325	1.5

## Order Code

<b>EGHP</b>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
	Grease tank	Outlet type	Outlet fitting	Fitting dia
	6 = 600mL	L = Left	D = Straight connector	0 = Φ4
		R = Right	H = Elbow connector	1 = Φ6
		D = Double outlet		2 = Φ4 (with pressure gauge)
				3 = Φ6 (with pressure gauge)
				4 = Φ8
				5 = Φ8 (with pressure gauge)
				6 = PT1/8
				7 = PT1/8 (with pressure gauge)

## Matching Parts

