

Adjustable Automatic Lubricator





GP-36C



GP-26C



OP-26C

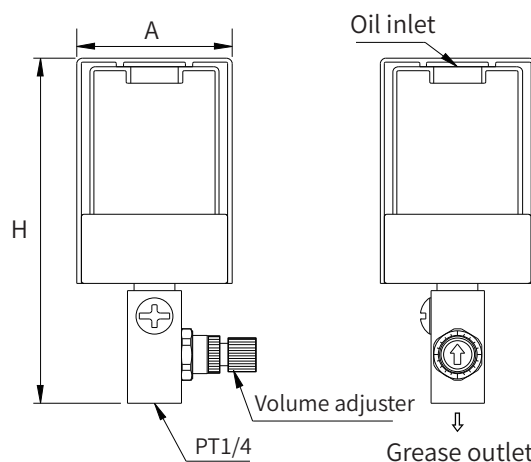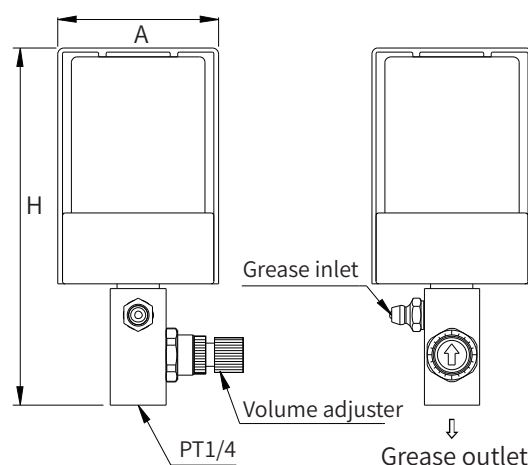

Specification

Model	Lubricants	Temperature	Adapters	H(mm)	Capacity	A(mm)	N.W(g)
GP-26C	NLGI 0~2	-20~+155℃	PT1/4-19	120.0	78	55	200
GP-36C			PT1/8-19	134.5	150	68	250
OP-26C	Oil		PT1/4-28UNF	120.0	78	55	220
OP-36C				134.5	150	68	250
CP-36C(brush)			Without	229.5	150	68	320

Feature

1. Adjustable Automatic Lubricators are divided by lubricant types. GP models are for grease. OP and CP-36C are for oil.
2. All models can automatically deliver the lubricant to a single lubrication point steadily.
3. CP-36C equips a brush but without adapters.
4. All models are suitable for lubricating linear guides, bearings, and motor shafts.
5. All models have volume adjusters that enable the users to adjust the volume of lubricant upon needs. For OP models and CP-36C, twist the volume adjusters clockwise to the zero point when they are not in use.
6. GP models: fill grease through grease nipples and close the grease nipple cap after filling up the grease.
7. OP and CP-36C models: fill the oil through the oil inlet, and put the oil cover back after finishing.
8. Do not use organic solvents such as toluene or carbon tetrachloride to clean the lubricant tank.