High Pressure Hose Assembly




Order Code

PSH-4-D-H-X-T-S


4	Φ4 fittings
6	Φ6 fittings
D	Left KD straight fitting
H	Left KH elbow fitting
D	Right KD straight fitting
H	Right KH elbow fitting
N	(None) standard
S	Custom materials
N	No spring sheath
T	With spring sheath
X	Length (m)

1. Composed of composite resin hoses and detachable fittings.
2. Easy to disassemble and assemble, screw the detachable fitting vertically into the hose and tighten the nut.
3. The composite resin hose is made of three layers: inner lining layer PA11, reinforcement layer polyester fiber, and outer covering layer polyurethane, with a burst pressure of 84MPa.
4. Suitable for situations with relative moving parts, spring sheath protection can be added, the applicable temperature range is -40 °C~80 °C.

Dimensions

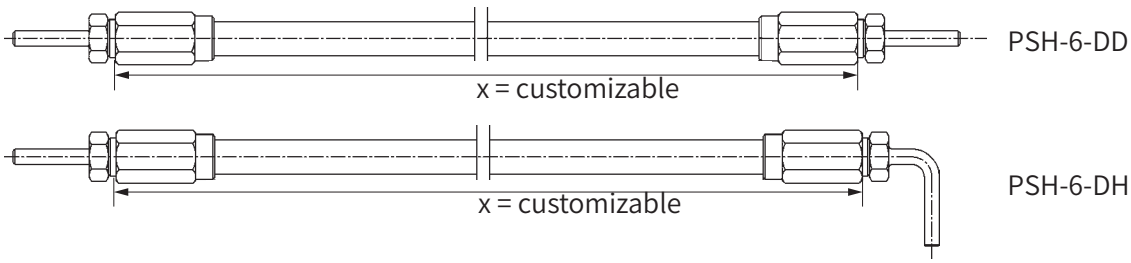


Straight fittings

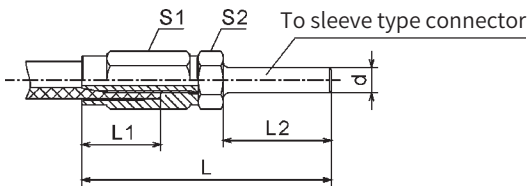

KD specification

Model	d	L1	L2	L	S1	S2	Hose
KD-4	Φ4	19	20	54	12	10	Φ4*8.6
KDS-6(SS304)	Φ6	19	30	64	12	10	Φ4*8.6
KD-6	Φ6	19	26	60	12	10	Φ4*8.6
KD-8	Φ8	19	26	60	12	12	Φ6.3*11.3

Straight fittings

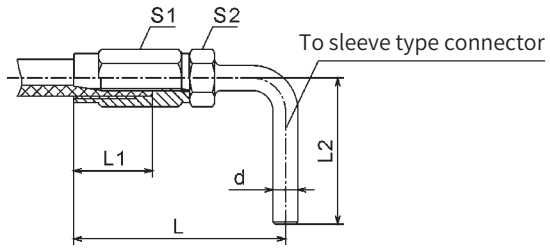

KH specification

Model	d	L1	L2	L	S1	S2	Hose
KH-6	Φ6	19	32	51	12	10	Φ4*8.6
KHS-6(SS304)	Φ6	19	35	51	12	10	Φ4*8.6
KH-8	Φ8	19	48	54	12	12	Φ6.3*11.3